

Reglazing a Winchester Window



Changing damaged glass is quick and easy with our snap-in interior glazing. Following the simple step-by-step instructions you can quickly install a new glass pack, and replace the sash in the window.




- 1.** All you need to reglaze a Winchester Window is a putty knife and a block of wood like those shown here.




- 2.** Starting at the center of the sash, place the blade of the putty knife in the seam between the glazing bead and sash frame. (Start with one of the longer glazing beads for added flexibility). While applying downward pressure, lean the handle of the knife towards the center of glass surface. After the blade recesses further into the sash, tilt the handle back away from the glass and draw it towards your body and then back away from your body. The glazing bead will begin to lift away from the sash.

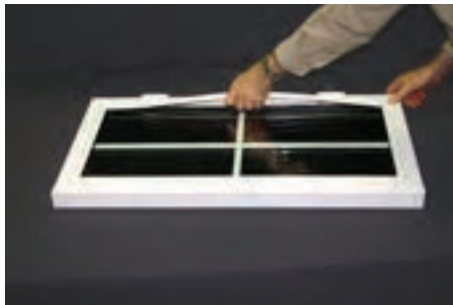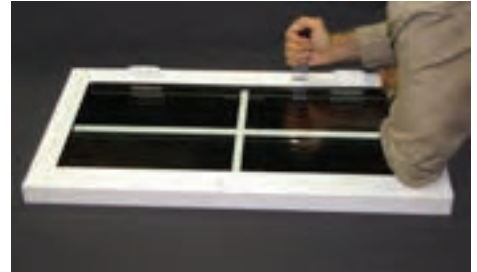

- 3.** Grip the glazing bead in the center and remove it from the sash. Repeat the same procedure (#2) to remove the remaining glazing beads.

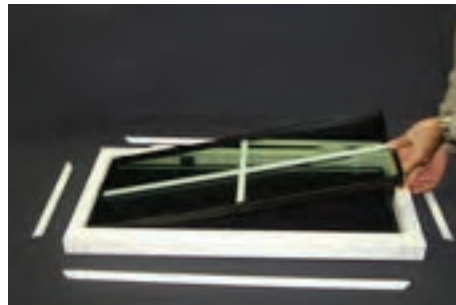

- 4.** Now remove the glass and replace with new unit. If necessary, new adhesive backed setting blocks, that adhere to the sash frame, can be used to replace those installed during manufacturing.

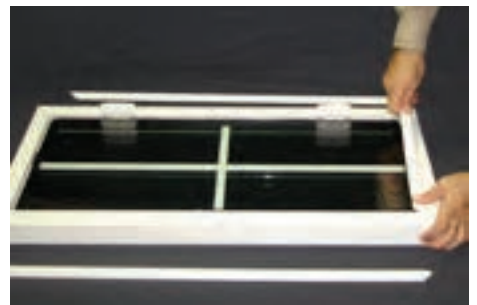

- 5.** To reinstall, start with one of the shorter glazing beads. Place the mitered edge in the corner of the sash, paying special attention to insure the lower leg of the bead is tucked behind the ledge that the setting block is attached to. Snap in opposite corner in the same manner.



- 6.** Repeat same actions as in (#5) on opposite side of sash. Remember to replace the short glazing beads first.



- 7.** Replace the longer glazing bead sections in the same manner as (#5 and #6). After inserting corners and gently pushing bead into place, use a block of wood or the heel of your hand to snap the glazing bead into place.

