

Swing N' Slide SLIDER Operate, Clean and Ventilation Instructions

Bristol Swing N' Slide Sliders utilize both sliding from left and right for ventilation, as well as, swinging inside for super easy inside cleaning. The Q-IV locking mechanism feature has a lock and open position. When locked the handle is at the bottom.

VENTILATION

- 1) Unlock Q-IV security lock by putting lever in upper most position, ①.
- 2) Slide left or right sash in to desired location for preferred air flow. (Note: when closing be sure to pull lever down to relock sash in place.



CLEANING

Clean vinyl and hardware with a non ammonia mild detergent or a mild abrasive for heavily soiled marks. Always use a mild window cleaner on the glass.

- 1) Repeat steps 1 and 2 for ventilation. Slide both sash in approximately 3-4", enough to clear jambs, toward center of window, using sash handles, see ② and ③.
- 3) Disengage swing n' slide release handles on the inner most sash: Push thumb release on bottom lock up to disengage locking handle, ⑥ and push handle down into sill, ⑦, to a horizontal position. Repeat same



- 3) For a secure ventilation, open Q-IV lock, pull vent latch out on outer most sash and slide inner sash until it stops at the steel spring ventilation lock, ④ and ⑤.



actions on the top of the sash pushing the locking handle into the track in the top of window.



actions on the top of the sash pushing the locking handle into the track in the top of window.



Swing N' Slide SLIDER Operate, Clean and Ventilation Instructions


Be sure both release handles are pushed all the way into the tracks.

- 4) Grasp inner sash rail and pull sash in toward yourself. Repeat step 3 (disengaging release handle) for outer most sash and pull sash inward. Sash are now completely open for easy cleaning of both sides.



SCREEN CLEANING:


- 5) Use a soft brush and a mild detergent to clean. If you wish to take the screen out, grasp lift rail and apply pressure to release from the screen track and tilt to bring screen to the inside, ⑧.

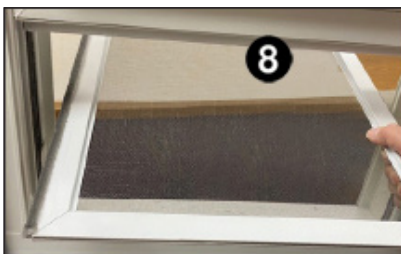

Note:
Due to the screen being a full screen there may be a slight difficulty pulling to the inside.

TO CLOSE SASH:

- 8) Close outer-most sash first by grasping and pushing sash back into frame. Once in place slide sash into the side jamb of the slider. Pull release handles back up and reengage into locking positions on the top and bottom of the sash, ⑨.
- 9) Repeat step 8 to close the inner most sash and reengage release handles, ⑨.
- 10) Complete closing by putting Q-IV security lock handle in the lower locking position, ⑩.

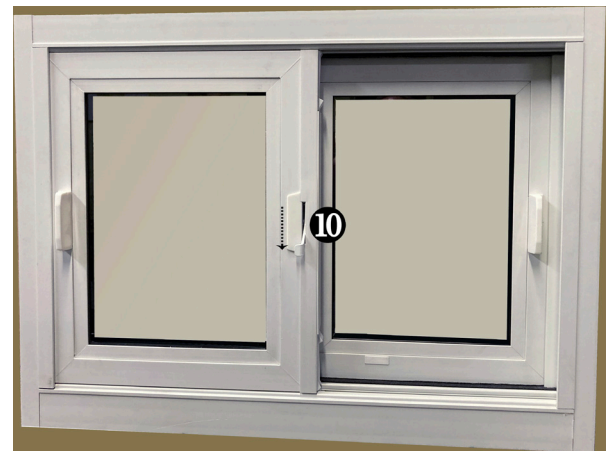

SLIDER ROUTINE MAINTENANCE

IMPORTANT NOTE: Periodically clean out both sill tracks for any debris buildup. Inspect weepholes on outside of window to see they are not clogged. If this maintenance is not done, water leakage may occur. In addition, failure to perform this maintenance could void your warranty.