

Swing N' Slide SLIDER Operate, Clean and Ventilation Instructions

Oxford Swing N' Slide Sliders utilize both sliding from left and right for ventilation, as well as, swinging inside for super easy inside cleaning.

VENTILATION

- 1) Unlock the 2 sweep locks by putting the levers in upper most position, ① & ②.
- 2) Slide left or right sash in from the frame location to desired location for preferred air flow, ③ & ④. (Note: when closing be sure to pull levers down to relock sash in place.



- 3) For a secure ventilation, open the vent latch, by pulling inward and slide inner sash until it stops at the steel spring ventilation lock, ⑤ and ⑥.



CLEANING

Clean vinyl and hardware with a **non ammonia mild detergent** or a **mild abrasive** for heavily soiled marks. Always use a mild window cleaner on the glass.

- 1) Repeat steps ① & ②. Slide both sash in approximately 3-4", ③ & ④, enough to clear jambs, toward center of window, using sash lift rails to slide.
- 3) Disengage swing n' slide release handles on the inner most sash: Push thumb release on bottom lock up to disengage locking handle, ⑦ and push handle down into sill, ⑧, to a horizontal position. Repeat same actions on the top of the sash pushing the locking handle into the track in the top of window.



Swing N' Slide SLIDER Operate, Clean and Ventilation Instructions


Be sure both release handles are pushed all the way into the top and bottom tracks.

- 4) Grasp inner sash rail and pull sash in toward yourself. Repeat step 3, 7 & 8 (disengaging release handles) for outer most sash and pull sash inward. Sash are now completely open for easy cleaning of both sides and screen.



SCREEN CLEANING:

- 5) Use a soft brush and a mild detergent to clean. If you wish to take the screen out, grasp lift rail and apply pressure to release from the screen track and tilt to bring screen to the inside, 9.

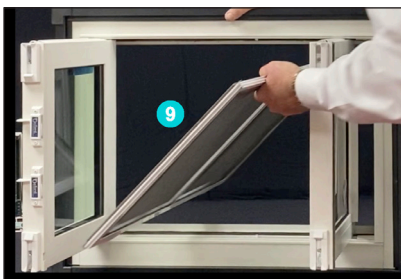

Note:
Due to the screen being a full screen there may be a slight difficulty pulling to the inside.

TO CLOSE SASH

- 8) Close outer-most sash first by grasping and pushing sash back into frame. Once in place slide sash into the side jamb of the slider. Pull release handles back up and reengage into locking positions on the top and bottom of the sash, 10 & 11.



- 9) Repeat step 8 to close the inner most sash and reengage release handles.
- 10) Complete closing by pulling lock handles in the lower locking position, 12 & 13.



SLIDER ROUTINE MAINTENANCE

IMPORTANT NOTE: Periodically clean out both sill tracks for any debris buildup. Inspect weep holes on exterior side of window to see they are not clogged. If this maintenance is not done, water leakage may occur. In addition, failure to perform this maintenance could void your warranty.